

T80 Pro-Fit

Electric Shower

TRITON

See you first thing Britain



PRO CONNECT

Retro-fit

Generous footprint will cover the original T80Z Fast-Fit as well as most competitor models

Entry points

8 water and 8 cable entry points

Dual water inlet

For easy pipe connection either left or right, copper or plastic, compression or popular push fit

Easier fitting

Wire free cover fit with the popular right inlet supplied open and more wall fixing holes

PRO DURABLE

Dura-Flow™

Triton's newly designed Dura-Flow™ heater technology helps to reduce the build up of limescale, extending the life of the shower and is ideal for use in hard water areas

Shower head

A large diameter, 5 position Dura-Flow™ shower head that is easy to clean, with rub-clean nozzles and removable sprayplate

Product guarantee

Backed by Triton's 2 year full parts and labour guarantee

PRO FLEXIBLE

Universal rail

Longer length riser rail up to 620mm ideal for replacement installations

Rail brackets

Both fixing brackets are adjustable to fit any existing holes – no need for additional drilling

Shower hose

Longer 1.5m anti-twist Dura-Flow™ hose

PRO FINISH

Universal rail

Fully adjustable riser rail for even overhang with Clip-Fit tray

Separate trims


Entry trims can easily be removed and fitted with the shower in situ without tools allowing a cleaner finish

BEAB
Approved

CE



KN 52019
BS EN 60335-2-35

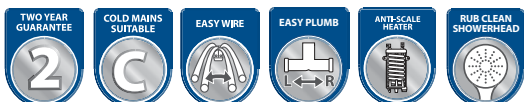

T80 Pro-Fit

Electric Shower

TRITON

See you first thing Britain

Shower

Power ratings	7.5kW	8.5kW	9.5kW	10.5kW	Eco 8.5kW
Energy rating	A	A	A	A	A
kWh per annum	477	482	483	480	482
Nominal Flow Rate*	3.99	4.52	5.05	5.58	4.52

* Outlet temp set 42°C - inlet temp set 15°C - operating voltage 240

Dura-Flow™	Longer life anti-scale heater
Dual water connection	15mm wide compression** or push-fit
Swingfit™ terminal block	16mm max cable
Water pressure min	1bar (running at 8 l/min)***
Water pressure max	10 bar (static)
Removable pipe/cable trims	Top & bottom (15mm pipework & 38mm cable trunking)
Other installation aid(s)	Wall mounting template

** Nut and olive supplied if using compression fitting

***10.5kW : 1.5 bar (running at 11 l/min)

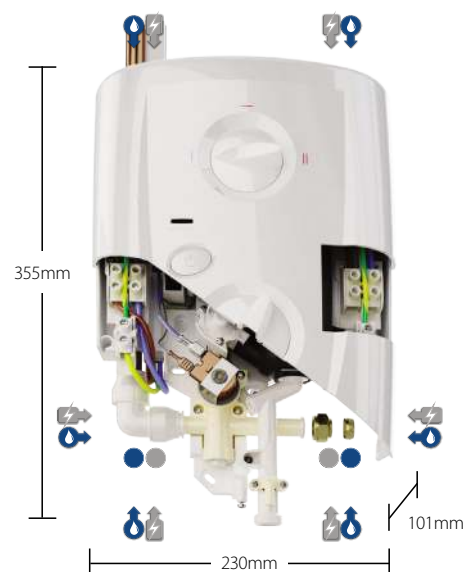


Diagram Key:

Water Entry points

Cable Entry points

Riser Rail Kit

Shower kit

- Longer 670mm rail allows direct replacement of any standard riser rail (480mm to 620mm fixing centres)
Rail height is adjustable to ensure even rail overhang
- Both riser rail wall brackets are adjustable offering the flexibility to:
 - Fix on the grout lines
 - Fix in the centre of tiles
 - Reuse any existing fixing holes
- Twist lock height adjustable handset holder
- Optional Clip-Fit bottle tray supplied



Shower Head & Hose

The new **Dura-Flow™** shower head features rub clean nozzles and a removable spray plate for cleaning the waterways.



The new **Dura-Flow™** anti-twist 1.5m hose prevents twists and kinks. The hose swivels independently of the cone, even when the cone is screwed in place.



Product Codes

T80 Pro-Fit 7.5Kw	SP8007PF	T80 Pro-Fit 9.5Kw	SP8009PF
T80 Pro-Fit 8.5Kw	SP8008PF	T80 Pro-Fit 10.5Kw	SP8001PF
		T80 Pro-Fit Eco 8.5Kw	ECO8008PF

