




Basin mixer Installation

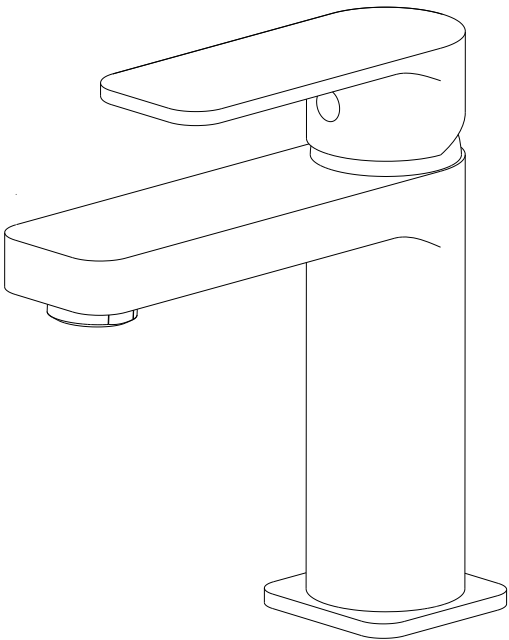



Optional Basin Waste

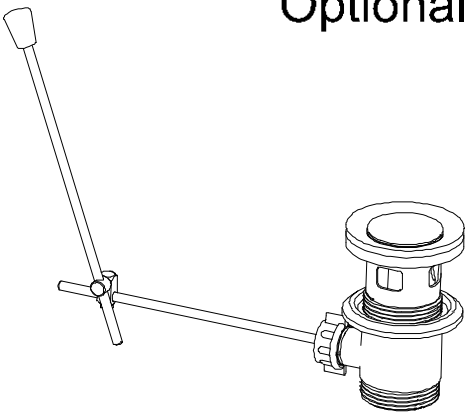

Pop Up Waste




Click Waste

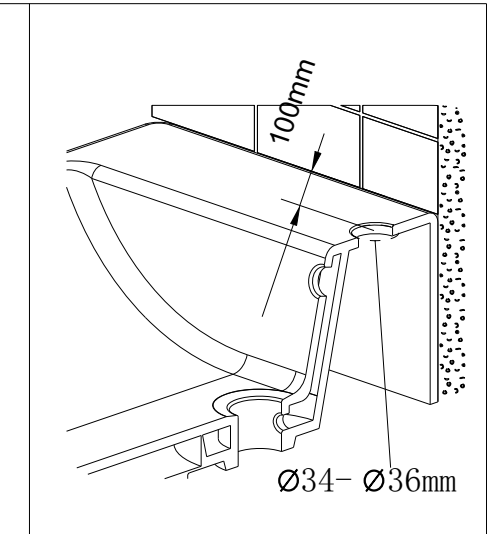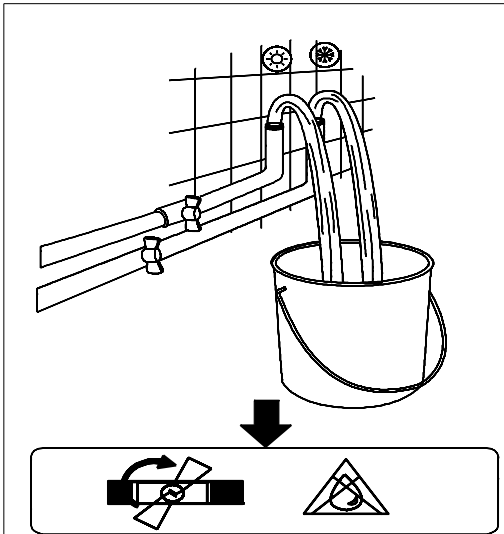

Product Specification	
Minimum Pressure	Maximum Pressure
0.5bar	6.0bar


NOTE:
ISOLATION VALVE NOT SUPPLIED



Cleaning All surfaces should be cleaned using a clean damp cloth. No abrasive cleaning agents or materials should be used.


Flexible Connecting Pipes

Care must be taken when connecting the flexible connection pipes to the household pipework to ensure they do not bend sharply and kink or twist.




Slight bend

✓




90° Angle

✓




Kink

✗



Curved round

✗




Twists

✗


Important: Failure to follow these guidelines may result in poor performance and damage to the flexible connecting pipes.

Horse Shoe Type Fixing Kit


1

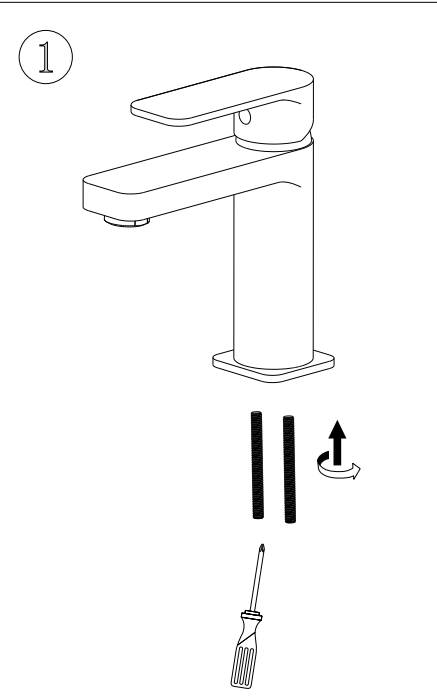


2

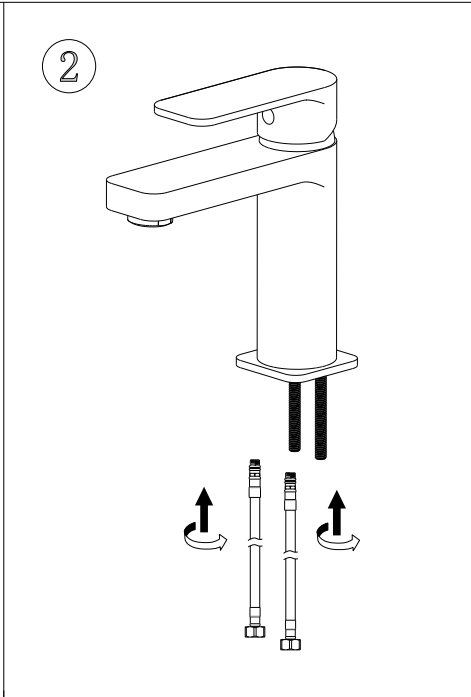

3

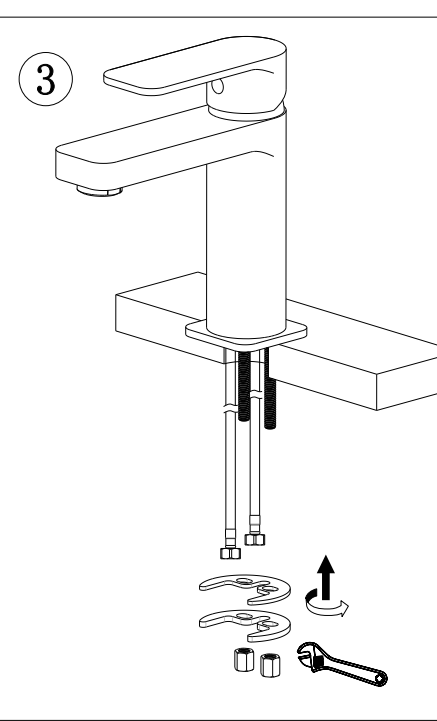


4

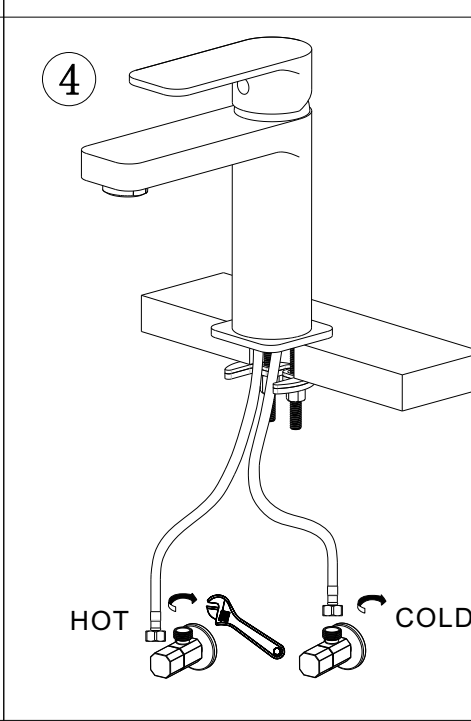


HOT COLD

Locknut With Screw Fixing Kit

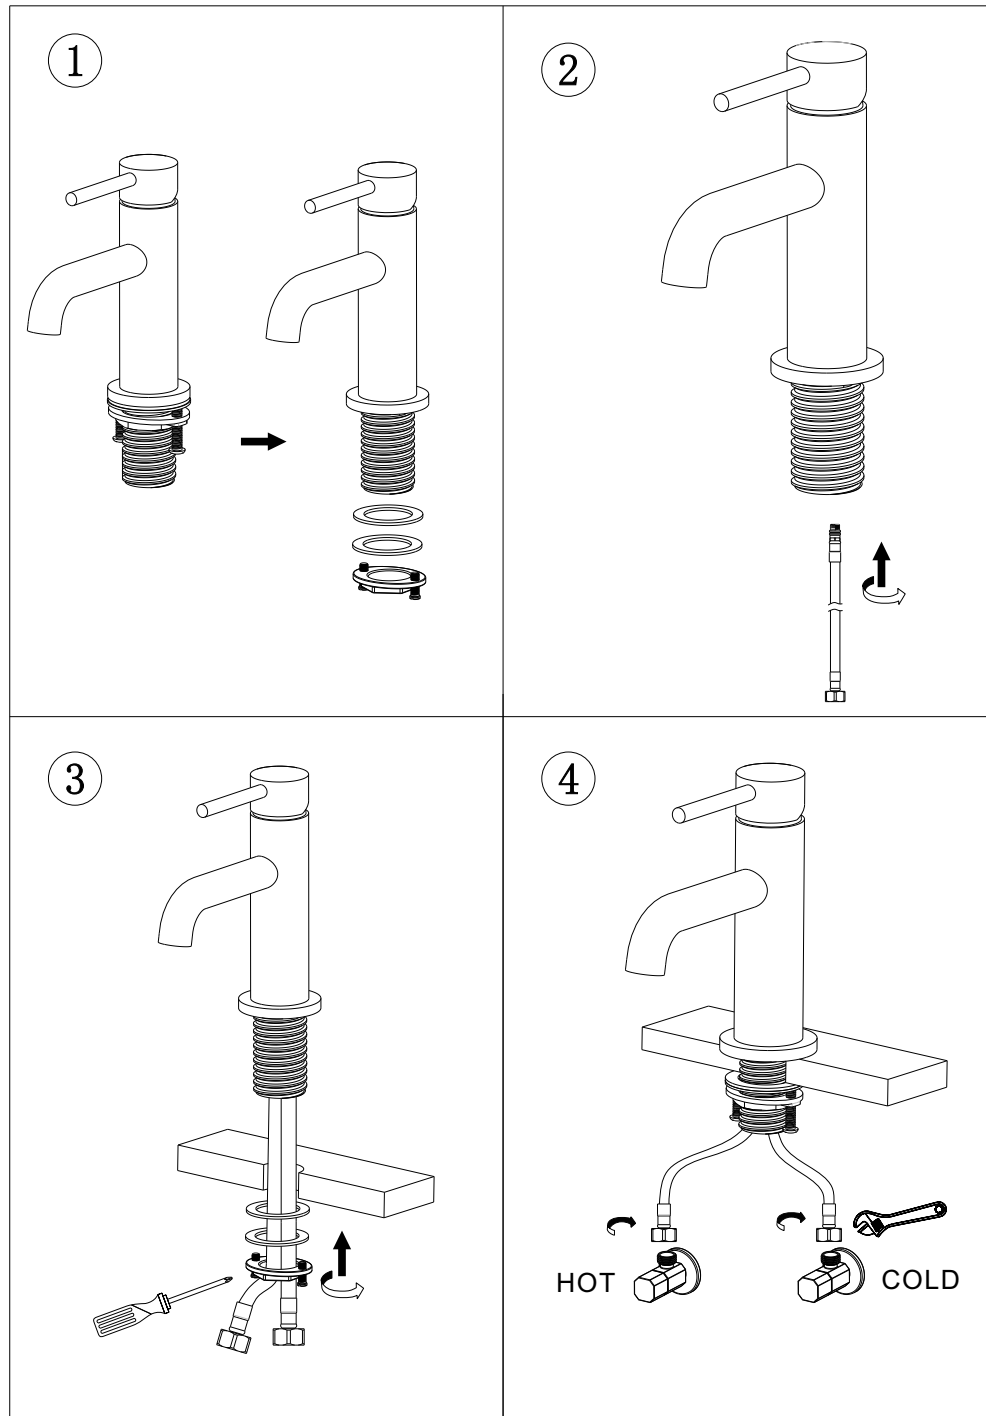

Securing Collar Fixing Kit

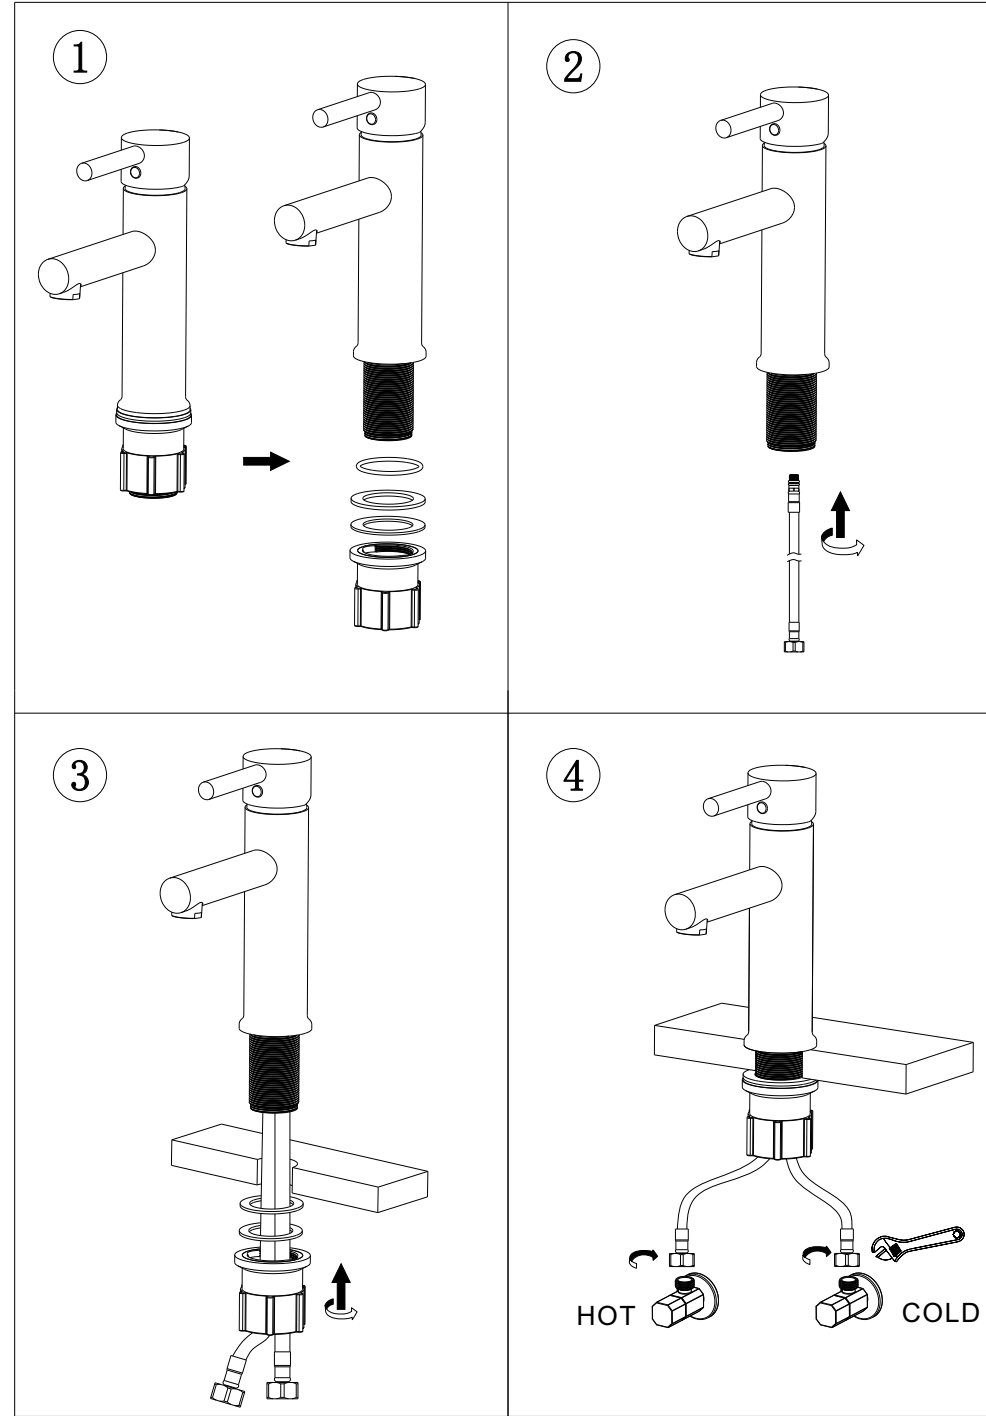

Locknut Fixing Kit

