



Electroflo Sensor and Control Box

Code

CIST215

Description

Touch free infrared WC flushing for use with Osmo cistern.

Water Saving

Dual flush operation for maximum water saving

Features

- Factory set single flush operation can be converted to dual flush easily offering flexibility
- Hygienic touch free operation
- Sensor detects hand gestures for operation; wave for full flush, hold hand in front of sensor for reduced flush
- LED flush indication
- Post flush sensor delay allows the cistern to refill fully before another flush can be delivered
- Battery operated (4 x 1.5V AA batteries)
- 100mm Surround includes instructional graphics
- 40mm or 100mm sensor surrounds available (sold separately)

Operating Voltage

6V DC

Nominal Voltage

230V AC

Sensor Range

50mm




100mm Surround Options:

CIST217: 100mm surround - Single flush

CIST218: 100mm surround - Dual flush

Product Extras:

CIST110: Mains Adapter (230V AC 50Hz)

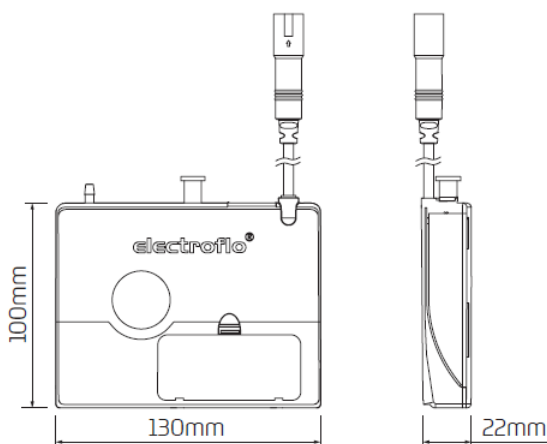

Single Flush Surround
CIST217



Dual Flush Surround
CIST218