


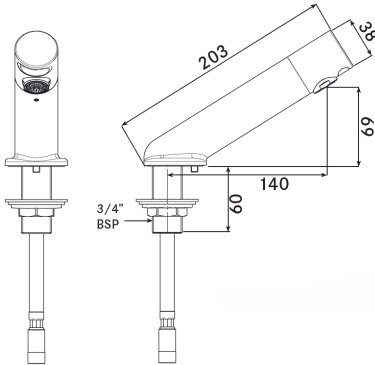

AT03-003

Aquarius A32 DOC M Polished with PEX hose

The Aquarius range incorporate simple and modern design, with the latest electronic functionality. Sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flow control. (Standard 5LPM, Other flow rates available). Automatic purge function, Sensor range adjustment, Wave on/wave off function, Anti Vandal and Lock Out functions, Chlorination function. Single mixed feed connection by PEX lined hose (15mm connection). External TMV required.

Technical data

Type of tap
Material
Surface finish
Gross weight
Type of operation
Type of mounting
Type of mixing
Automatic purge
Purge run time
Spout projection
Minimum flow pressure
Volume flow rate at 3 bar
Adjustable run time
Water connection
Anti-Vandal function
Lock out function
Chlorination function
Battery or mains station kit
Working pressure
Max working temperature
Fixing
Fixing length

Polished finish. Requires a Station kit to operate. Station kits available in Single Station Battery or Mains Single Station, 2 Station or 3 Station for multiple connections. Refer to Station kit data sheets.

Aquarius A32
316 stainless steel
Polished
1.1kg
No touch sensor
Deck mounted
Additional TMV may be required
Yes* - Default: OFF/Options: 3, 6, 12, 24, 36 & 48 hours
Default 1 min/ Options: OFF, 30 secs, 1, 2, 4 & 8 mins
140mm
1.00 bar (Lower pressure station kits available)
5LPM (Other flow rates available)
Yes* - Default: 2 secs/ Options: 2, 5, 10, 15, 20, 30 secs
15mm PEX hose
Yes
Default OFF/ Options: OFF, 4, 6, 8 & 10 operations
Yes* - Default 2 mins/ Options: 1, 2, 3, 4, 5, 10, 20 & 30 mins
Single Battery: AT00-001 Single Mains: AT00-002 - Other options available. Contact KWC DVS.
1-10 Bar (For Low / High pressure, Contact KWC DVS.)
60°C
¾" BSP
Up to 50mm with flange nut